

NL Handleiding DISC SDE met microwave sensor en noodunit 3u

Afmetingen:









Accessoires

Nr.	Abbeelding	#	Gebruik
1		3	Schroeven
2		3	Pluggen
3		1	Afbeelding

Montage:


Toestel openen

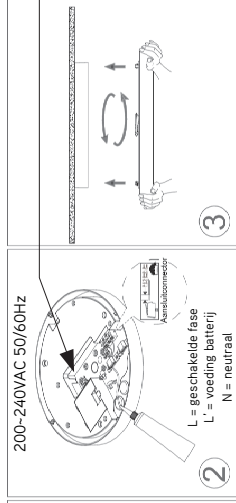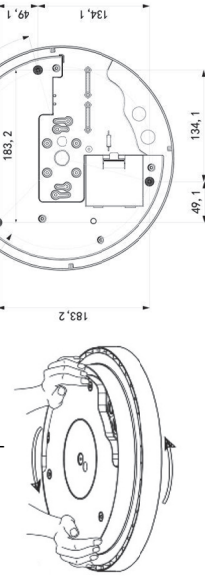


Schakel steeds de netspanning uit bij installatie of onderhoud.
Raak de leds of andere elektronische componenten niet aan.
Gebruik geen chemische reinigingsmiddelen bij het schoonmaken.

Detectie gebied

Detectie plafondmontage

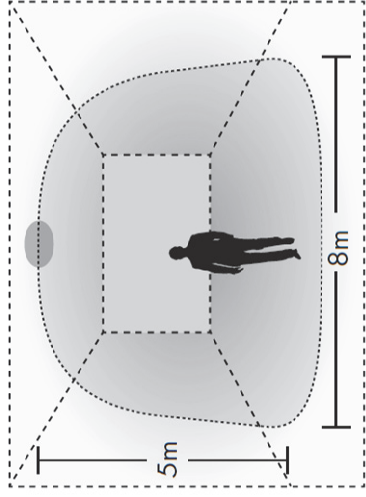


Detectie muurmontage

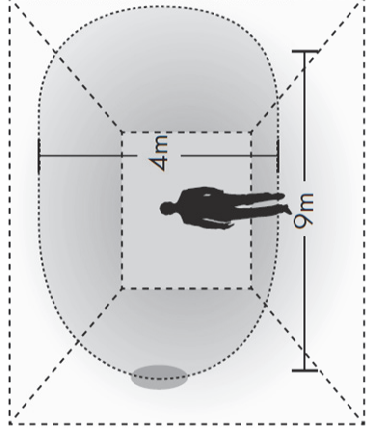

NL Handleiding DISC SDE met microwave sensor en noodunit 3u

Instelmogelijkheden microwave sensor:



Detectie gevoeligheid

De gevoeligheid van het detectie gebied kan aangepast worden aan de hand van de dip-switch instellingen.

I	II	III	IV
100%	75%	50%	10%

Uitschakeltijd

De uitschakeltijd is de tijdsperiode dat het toestel 100% licht blijft geven als er zich geen personen meer in het detectiegebied bevinden.

I	II	III	IV
5s	30s	3min	10min

Daglicht sensor

Luxniveau vanaf welk lichtniveau de sensor in het toestel actief wordt.

I	II
Disable	50Lux

Uitschakeltijd na dimming

Dit is de tijdsperiode dat het toestel op een gedimd lichtniveau gaat branden alvorens volledig uit te schakelen. 0s = sensor aan/uit zonder dimming.

I	II	III	IV
0s	30s	10min	+∞

"4∞"het toestel schakelt nooit volledig uit.

Dim niveau

Dit is het gewenste gedimd lichtniveau na de uitschakeltijd.

I	II
10%	30%

Specificaties noodunit

Batterij type: LiFePO₄, 6.4V, 1500mAh

Lumenoutput bij nood: 180lm - 210lm

Batterijduur: 3uur

Batterij laadtijd: 24uur

Batterij laden en volledig opgeladen: LED indicator is altijd aan


Batterij ontlading: LED indicator is uit

Levensduur batterij: 14 jaar

Max. batterij werkingstemp.: 60°C

Min. batterij werkingstemp.: 0°C

Ontladingsfrequentie: één keer per jaar



Installatie en onderhoud dienen steeds te gebeuren door gekwalificeerd personeel.
De lichtbron van dit armatuur is niet vervangbaar, bij einde van de levensduur moet het armatuur vervangen worden..

Beschadigde toestellen in originele verpakking worden onder waarborg omgeuild.

De aarding moet ten alle tijden correct aangesloten worden om veiligheidsproblemen te voorkomen.

Controleer steeds of de correcte aansluitspanning aanwezig is.

Gebruikte lampen


Breng oude of defecte LED armaturen steeds binnen in een geschikt verzamelpunt in overeenstemming met de geldende voorschriften met betrekking tot milieubescherming. Gebruikte lampen kunnen gedeponeerd worden in een recyclingpunt waar ze gratis worden geaccepteerd. Een correct gebruik van apparatuur maakt het mogelijk om waardevolle milieuhulpbronnen te behouden en negatieve gevolgen voor de gezondheid en het milieu te voorkomen.

Dimensions:






Accessories

No.	Pic.	Qty.	Usage
1		3	Fix light
2		3	Plastic parts
3		1	Rubber plug

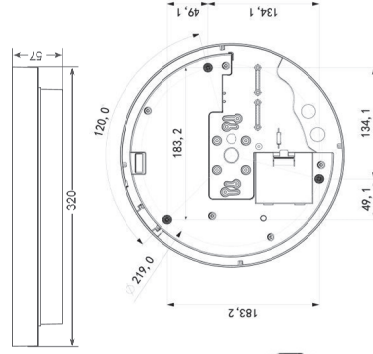

Montage:


Open the luminaire

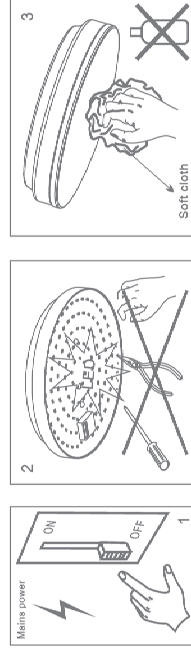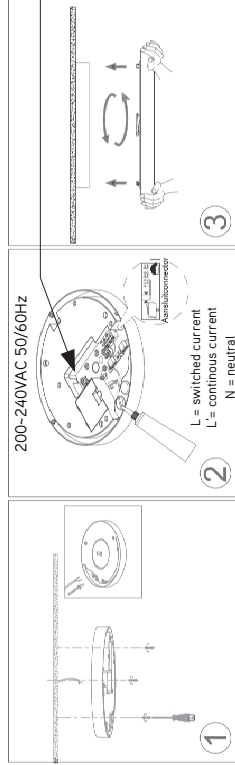


Always shut down the power supply with installation or maintenance.
Don't touch the LED's or other electrical components.
Do not use chemical products when cleaning the luminaire.

Detection Pattern


Ceiling mounting pattern

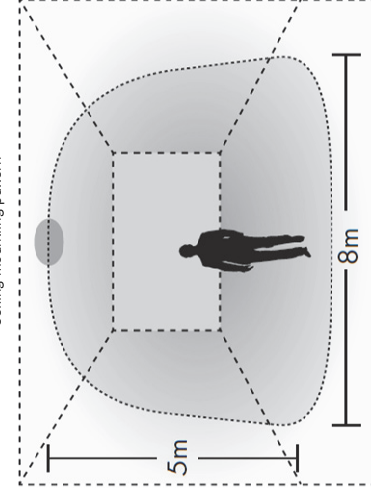

Wall mounting pattern

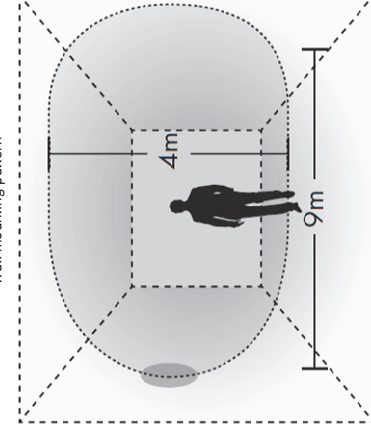

Sensor On-off / dimming setting options for sensor / emergency



Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely for each specific application.

I	II	III	IV
100%	75%	50%	10%

Hold-time

Hold-time means the time period you would like to keep the lamp on 100% after the person has left the detection area.

I	II	III	IV
5s	30s	3min	10min

Daylight sensor

The day/light threshold can be set on DIP switches, to fit for particular application.

I	II
Disable	50Lux

Stand-by period (corridor function)

This is the time period you would like to keep at the low light output level before it is completely switched off in the long absence of people.

I	II	III	IV
0s	30s	10min	+∞

Note: "0s" means on/off control; "+∞" means bi-level dimming control, fixture never switches off.

Stand-by dimming level

This is the dimmed low light output level you would like to have after the hold-time in the absence of people.

I	II
10%	30%

Specifications if with emergency unit

Battery: LiFePO₄, 6.4V, 1500mAh

Lumenoutput emergency light: 180lm - 210lm

Batteries duration: 3uur

Battery charging & fully charged status: LED indicator is always on


Battery discharge: LED indicator is off

Battery life >4 years

Max. battery operating temperature: 60°C

Min. battery operating temperature: 0°C

Discharge frequency: Once a year



Installation and maintenance may only be performed by authorized and qualified personnel.

The lightsource of the luminaire is non-replaceable, at the end of its life-expectancy the luminaire needs to be replaced.

Damaged devices in the original packaging can be swapped under warranty.

The grounding has to be permanently properly connected to avoid safety issues.

Always check if the connection voltage is present.

Utilization of used lamps

LED lamps must be disposed of in accordance with current regulations concerning environmental protection. Used lamps should be returned to the applicable collection point, where they will be accepted free of charge. Proper utilization of equipment enables preserving valuable environmental resources and avoiding adverse impacts on health and the environment, which may be threatened by inappropriate waste handling.