

Integraconnect Bluetooth low energy interface IP20 for 0/1-10V drivers. With this interface you can simultaneously control and dim multiple LED luminaires with 0/1-10V driver. Connection voltage 100~240V. Maximum current draw 20mA for 0-10V and 40mA for 1-10V drivers. Integraconnect is 100% compatible with Casambi. Download the free app on the Apple store or Google play. Equipped with internal switching relay 1p 5A. Maximum load 1000W resistive, maximum 500W LED.



IP20



3 YEARS



PF



YES



YES



ENEC

NEE



JA

Technical specifications

Reference	ITC-110IP20
EAN code	5420076239671
ETIM code	EC002924

Electrical specifications

System power (W)	
Input voltage (Vac)	100-240
Frequency (Hz)	50/60
Dimmable	yes
Flicker free	yes
Power factor	
Connection cable	
Driver output (V)	
Driver output (mA)	
Isolation class	II
Energy class	A+
Driver brand	
Driver model	
Inrush current	
Number on C16A	
Number on D16A	

Dimension and material properties

Dimensions (LxWxH)	120x50x34mm
Weight (kg)	0,35
Working temp. (°C)	-20~+45
IP value	IP20
Number in bulk	
Number on pallet	0
MOQ	1
Stock item	yes


Warranty and certification

Lifetime (h)	
Warranty (year)	3
ENEC	no

DATASHEET


ITC-110IP20 Integraconnect 0/1-10V 20/40mA 2p 5A IP20

Dimension

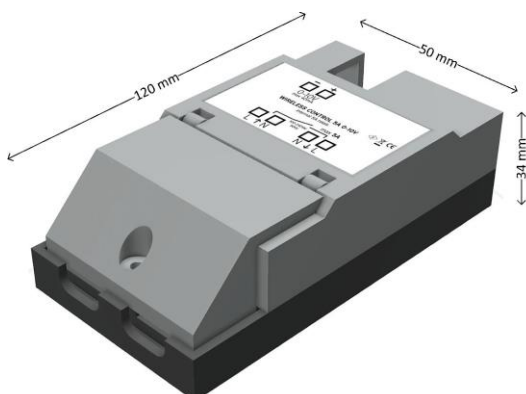

Connection diagram

LOW POWER LUMINAIRES

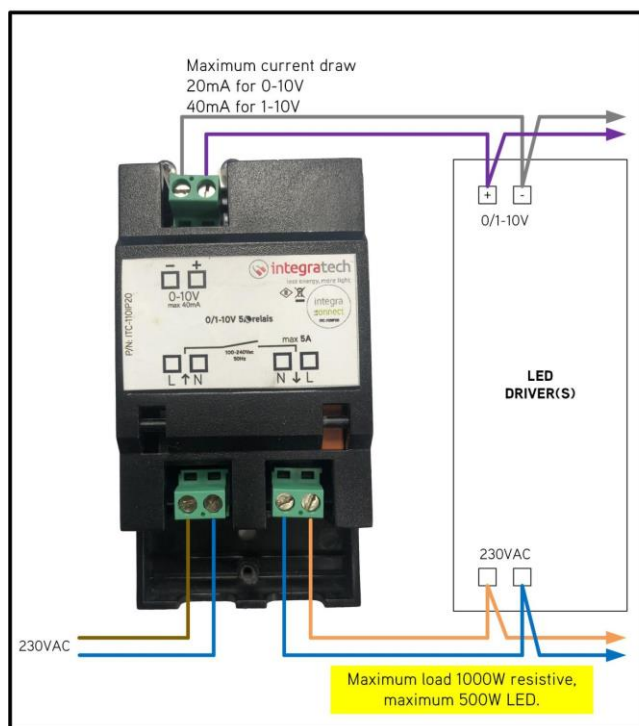

HIGH POWER LUMINAIRES

