


Description:

Ledstrip 120LED/m SMD2835 24V IP67 red 5m

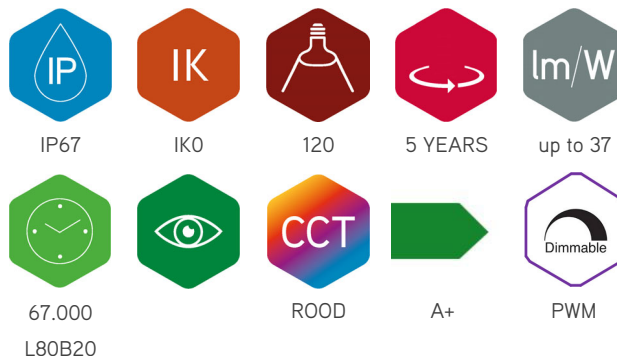

LED strip high performance with 120 SMD2835 LEDs per meter. Connection voltage 24VDC, dimmable with PWM controller. Suitable for outdoor applications IP67, 5m reel. Power 7,6W/m, can be shortened every 5 cm. 30cm connection cable on both sides. Connect maximum 15m in series if power supply on one side! Application: mood or niche lighting. Delivered including 5 end caps with cable entry, 5 end caps without cable entry and a tube of silicone.

Technical specifications

Reference	120LED-IP67-RO
EAN code	5420076247812
ETIM code	EC002706

Electrical specifications

LED power (W)	7,6
Input voltage (Vac)	24V
Frequency (Hz)	DC
Dimmable	PWM
Connection cable	0,3m
Energie class	A+

Dimensions and material properties

Dimensions (LxWxH)	5000x9x4mm
Buigradius (mm)	60
Kleinste sectie (mm)	5
Weight (kg)	0,2
Color	white
Working temp. (°C)	-20~+45
IP value	IP67
N° in masterbox	20
N° on pallet	0
MOQ	1


Warranty and certification

Lifetime (h)	67.000 L80B20
Warranty (years)	5
ENEC approved	no


Photometric specifications

Light angle (°)	120
Color temperature (K)	ROOD
CRI	
SDCM	<3
Lumen output (Lm)	287
Lm/W	37
Flux code	46 80 96 100 102
Ledchip	SMD2835
Led manufacturer	Refond
N° of LEDs/m	120


Lumen distribution

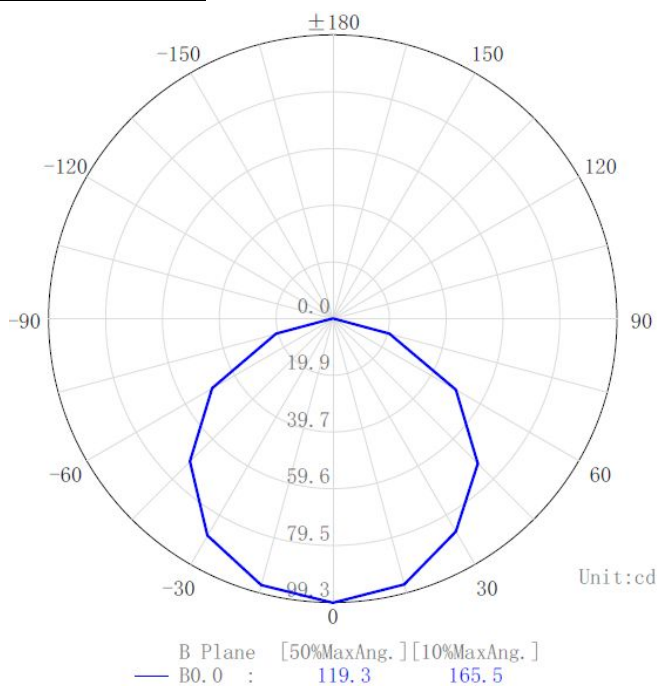


Distance curve:

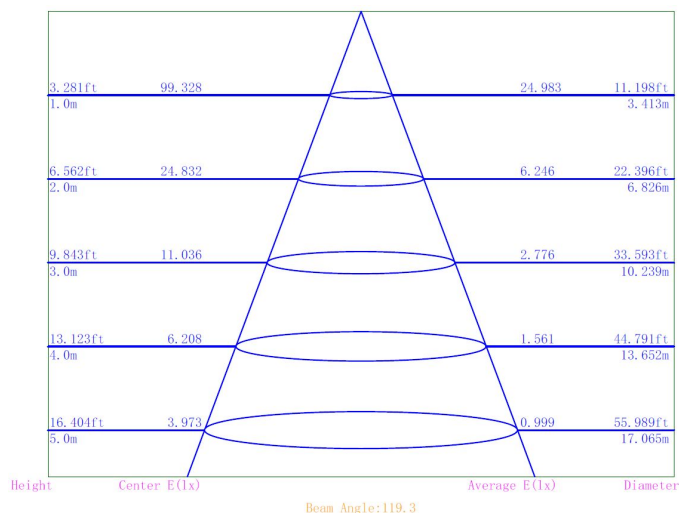



Spectrum distribution

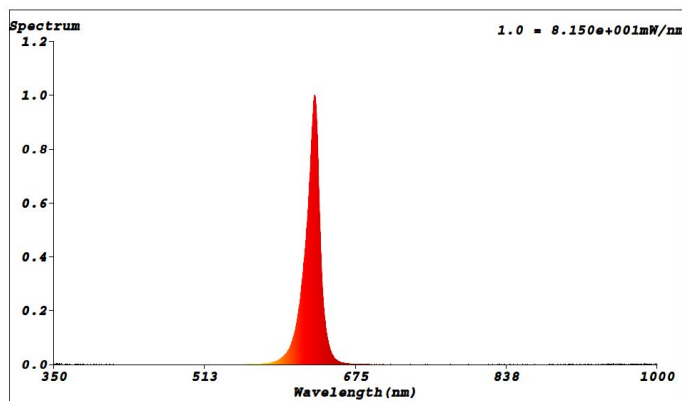

Lumendrop

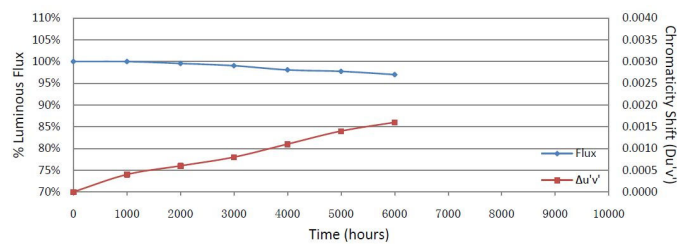


Dimensions

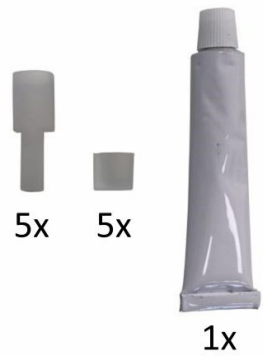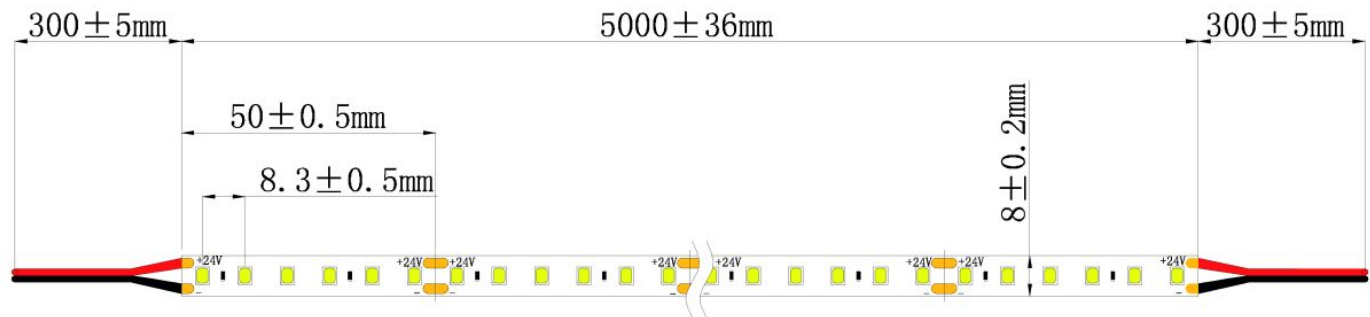


Connection diagram

BASIC ON/OFF

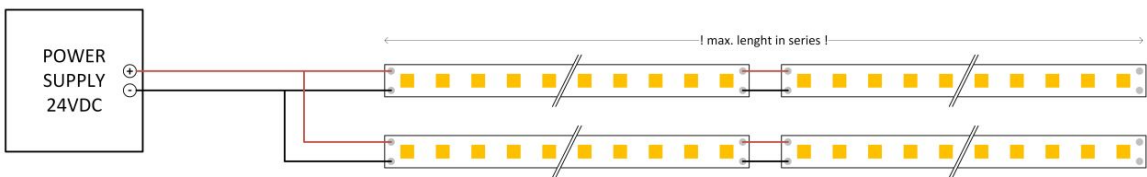

DIMMING

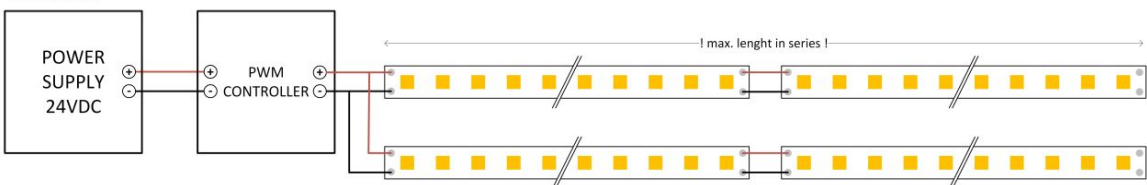

Type	Max. lenght in serie
64LED	12m
120LED	15m
120DOT	15m
120MLED	10m
128LED	10m
140FSLED	8m
160LED	8m
160POW	4m
196SDOT	15m
240DOT	9m
350DOT	8m
60BLED	5m
120SIDE	11m