




Description:

Ledstrip 128LED/m SMD2835 24V IP67 6000K 5m

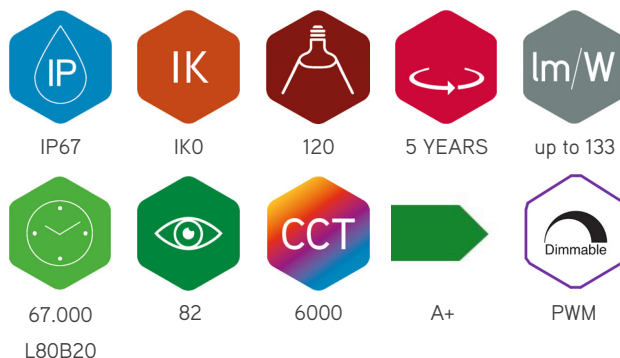

LED strip high performance with 128 SMD2835 LEDs per meter. Connection voltage 24VDC, dimmable with PWM controller. Suitable for outdoor applications IP67, 5m reel. Power 8,6W/m, can be shortened every 6,25 cm. 30cm connection cable on both sides. Connect maximum 10m in series if power supply on one side! Application: small accents, mood or local lighting indirect. Delivered including 5 end caps with cable entry, 5 end caps without cable entry and a tube of silicone.

Technical specifications

Reference	128LED-IP67-6000
EAN code	5420076247973
ETIM code	EC002706

Electrical specifications

LED power (W)	8,6
Input voltage (Vac)	24V
Frequency (Hz)	DC
Dimmable	PWM
Connection cable	0,3m
Energie class	A+

Dimensions and material properties

Dimensions (LxWxH)	5000x10x4mm
Buigradius (mm)	60
Kleinste sectie (mm)	6,25
Weight (kg)	0,2
Color	white
Working temp. (°C)	-20~+45
IP value	IP67
N° in masterbox	20
N° on pallet	0
MOQ	1


Warranty and certification

Lifetime (h)	67.000 L80B20
Warranty (years)	5
ENEC approved	no


Photometric specifications

Light angle (°)	120
Color temperature (K)	6000
CRI	82
SDCM	<3
Lumen output (Lm)	1128
Lm/W	133
Flux code	48 81 96 100 100
Ledchip	SMD2835
Led manufacturer	Refond
N° of LEDs/m	128


Lumen distribution

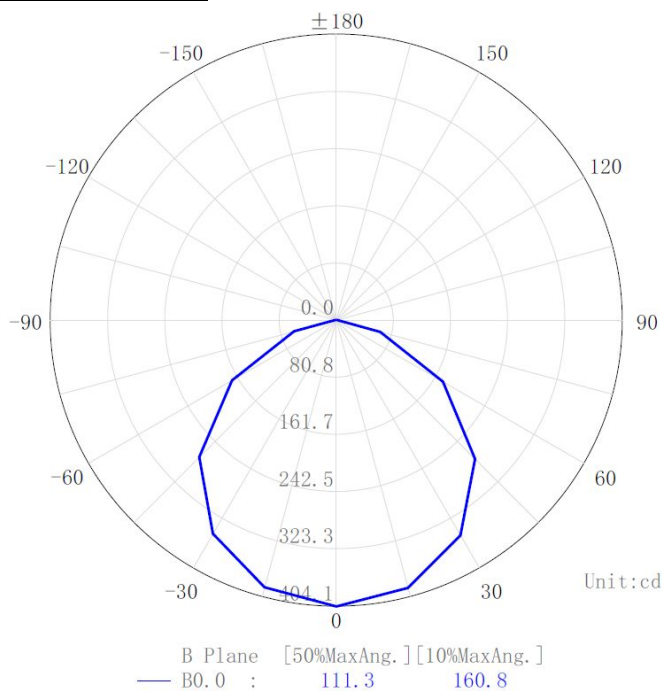


Distance curve:

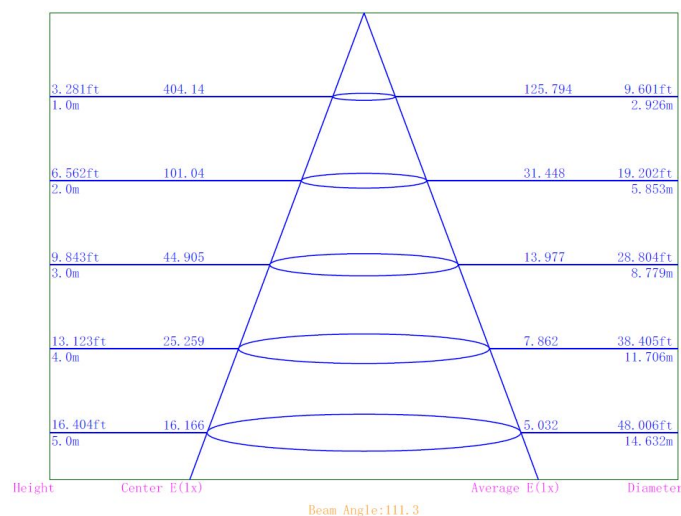


Spectrum distribution

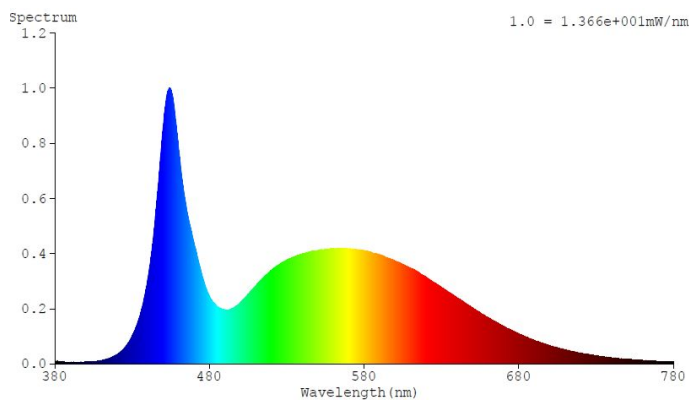

Lumendrop

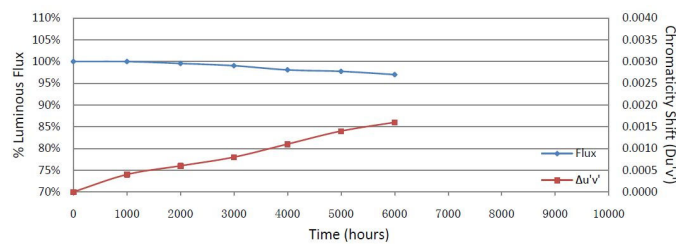

Dimensions

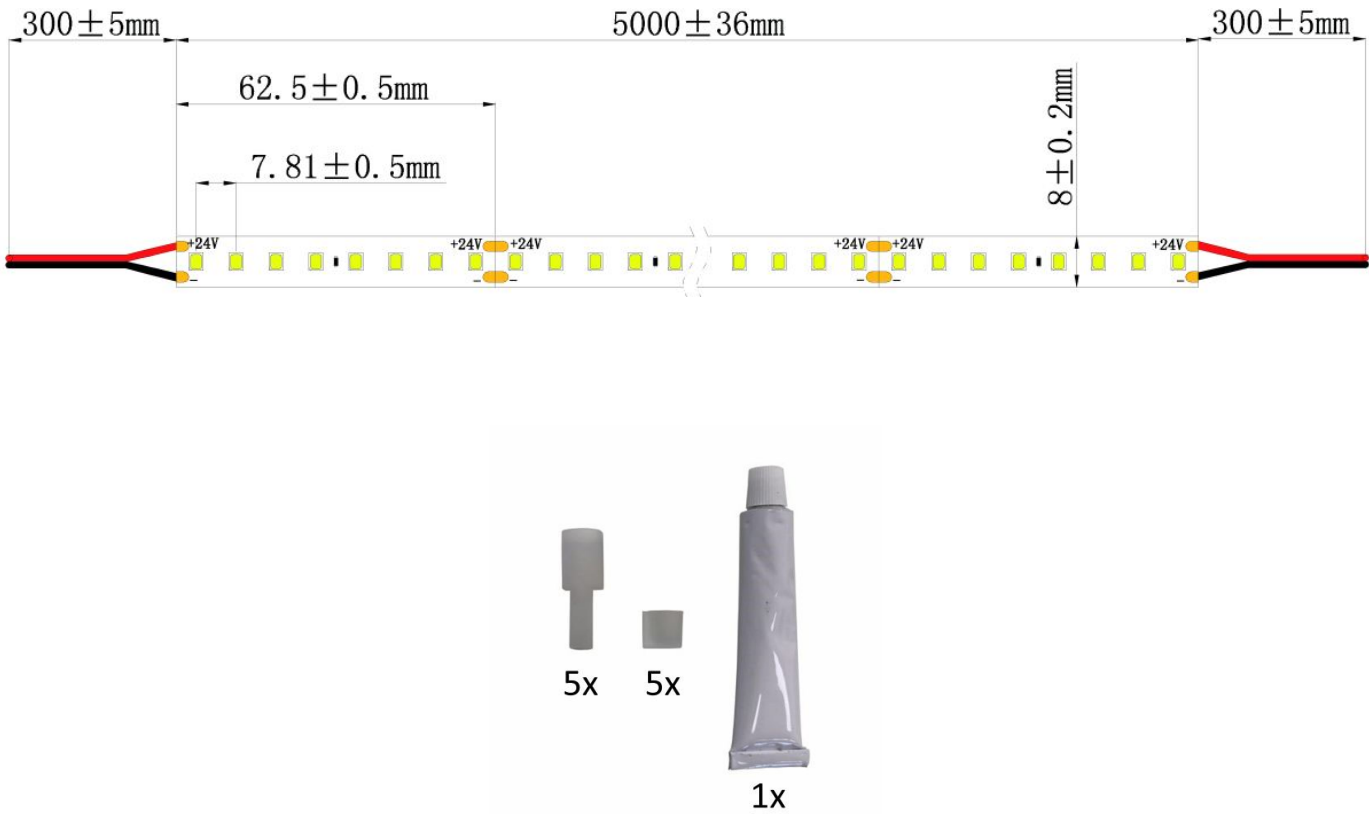

Connection diagram

