



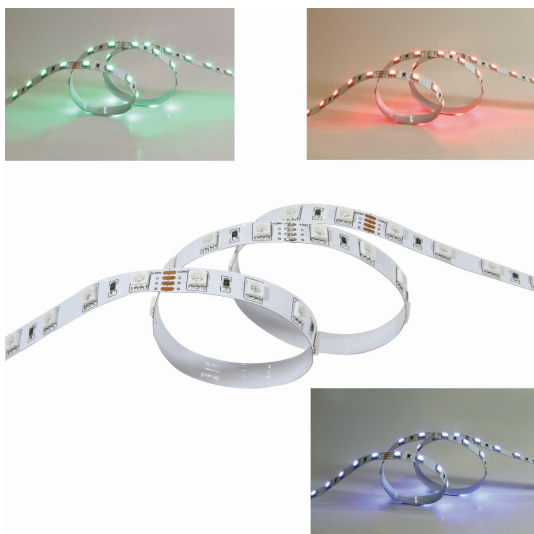

Description:

Ledstrip 60LED/m SMD5050 24V IP67 RGB 5m

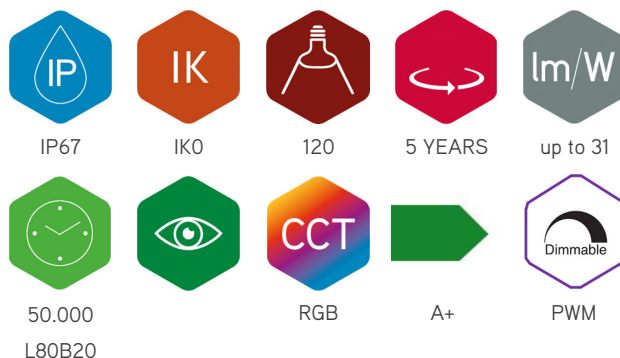

LED strip RGB with 60 SMD5050 LEDs per meter. Connection voltage 24VDC, dimming and changing colors with RGB controller. Suitable for outdoor applications IP67, 5m reel. Power 13,5W/m, can be shortened every 10cm. 30cm connection cable on both sides. Connect maximum 5m in series if power supply on one side! Application: creating color effects. Delivered including 5 end caps with cable entry, 5 end caps without cable entry and a tube of silicone.

Technical specifications

Reference	60RGB-IP67
EAN code	5420076248529
ETIM code	EC002706

Electrical specifications

LED power (W)	13,5
Input voltage (Vac)	24V
Frequency (Hz)	DC
Dimmable	PWM
Connection cable	0,3m
Energie class	A+

Dimensions and material properties

Dimensions (LxWxH)	5000x11x4mm
Buigradius (mm)	60
Kleinste sectie (mm)	100
Weight (kg)	0,45
Color	white
Working temp. (°C)	-20~+45
IP value	IP67
N° in masterbox	20
N° on pallet	0
MOQ	1


Warranty and certification

Lifetime (h)	50.000 L80B20
Warranty (years)	5
ENEC approved	no


Photometric specifications

Light angle (°)	120
Color temperature (K)	RGB
CRI	
SDCM	<3
Lumen output (Lm)	421
Lm/W	31
Flux code	47 79 95 100 99
Ledchip	SMD5050
Led manufacturer	Refond
N° of LEDs/m	60


Lumen distribution

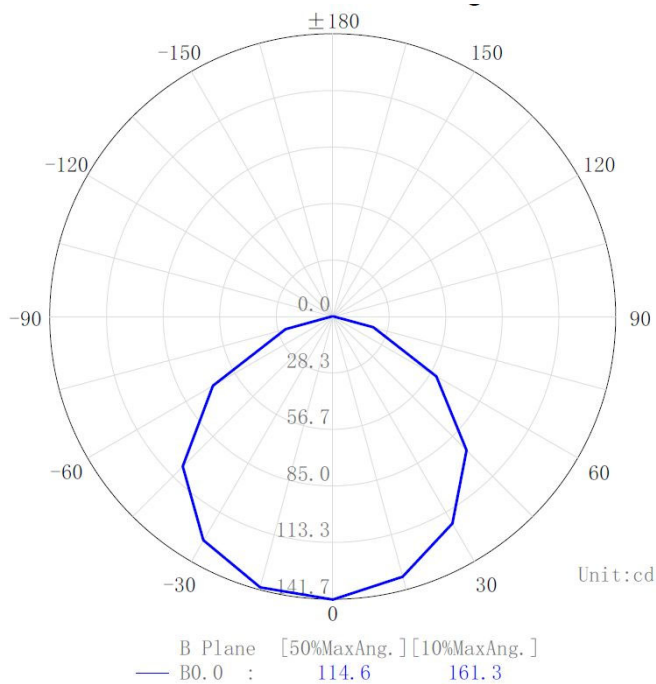


Distance curve:

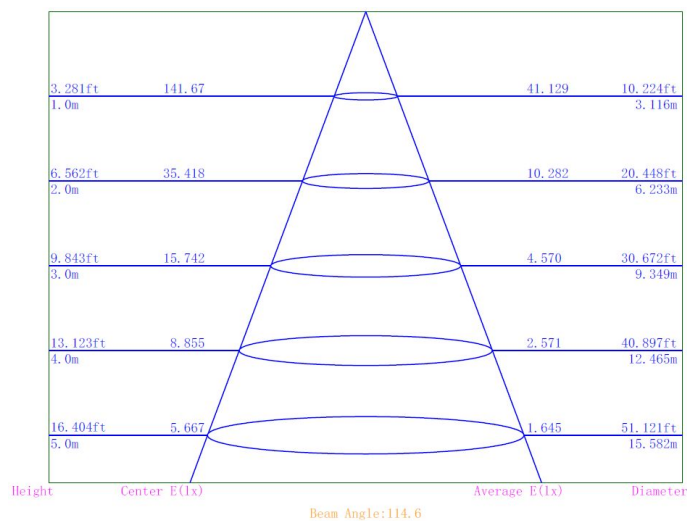



Spectrum distribution

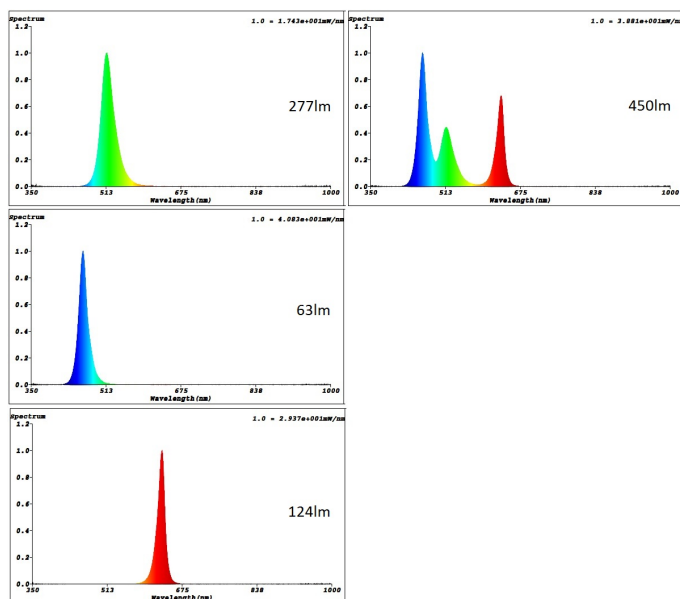

Lumendrop

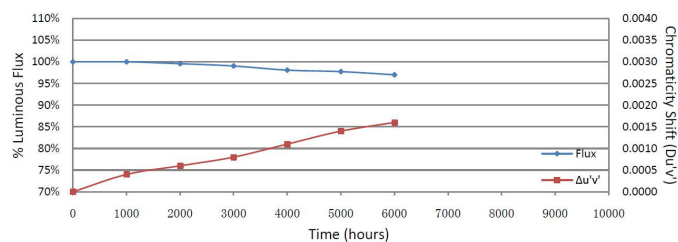

Dimensions

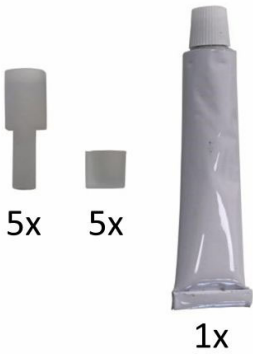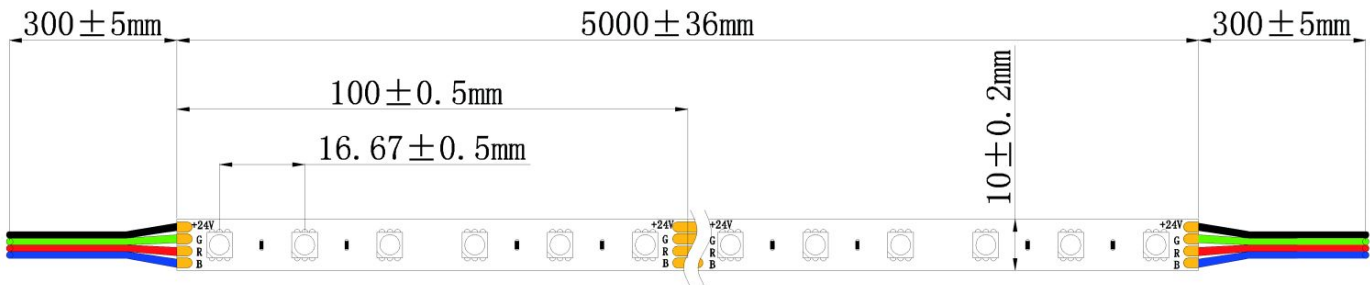

Connection diagram

