DATASHEET

B3008 Support profile Dreamline 2874mm 2U 8x2,5mm2

Integra Dreamline trunking rail white RAL9003 2874mm long, equipped with 8 conductors of 2.5mm² for 3 light circuits, dimming and emergency circuit. The trunking rails are firmly anchored in each other thanks to a new mechanical locking system that allows the suspension points to be 2 meters apart. Suitable for 2 Dreamline modules 1437mm.

IP40 | 5 YEARS | YES

Technical specifications

Reference	B3008
EAN code	5420076238087
ETIM code	EC000293

Dimensions and material properties

Dimensions (LxWxH)	2874x64,5x50mm
Outer diameter (mm)	
Cutout diameter (mm)	
Weight (kg)	3,42
Color	white RAL9003
IP value	IP40
N° in masterbox	8
N° on pallet	80
MOQ	1

Warranty and certification

Warranty (years)	5	(excluding batteries)

Accessories

DMA001	Dreamline ceiling bracket	
DMA002	Dreamline pending suspension with steel wire 2m	
A15CA	Dreamline plastic cover 1437mm	
DMA005	Dreamline endcap for support profile	
DMA006-8	Dreamline female connector 8p 8x2,5mm²	
DMA006M-8	Dreamline connector 8p 8x2,5mm2 male	
DMA013-8	Dreamline power connection bloc 8x2,5mm²	
DMA005SS	Dreamline steel endbox for support profile	

Dimensions

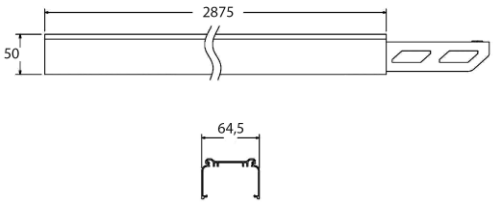

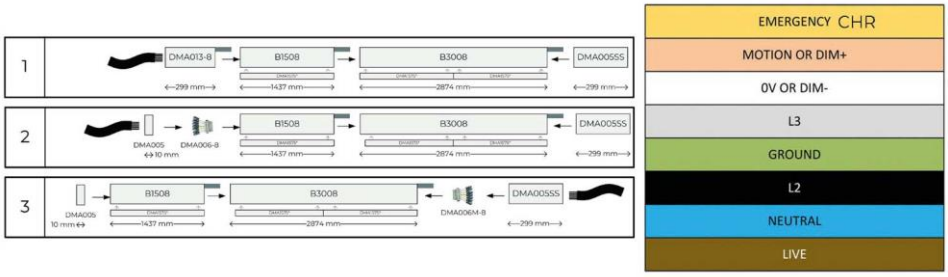

Visit our website for all test reports LM-79 / LM-80 / TM-21 and elumdat files, subject to changes without notice.
Rechargeable batteries (lead or NiCd) that are part of a lighting device always have a one-year warranty!