




Stylish IP54 surface-mounted luminaire 10W neutral white 4000K with white base RAL9004 and opal cover in impact resistant IK10 polycarbonate. Equipped with SMD2835 leds on an aluminum PCB with a flicker-free driver. Thanks to the separate mounting base and the toolless connection terminal, the luminaire can be installed in no time.

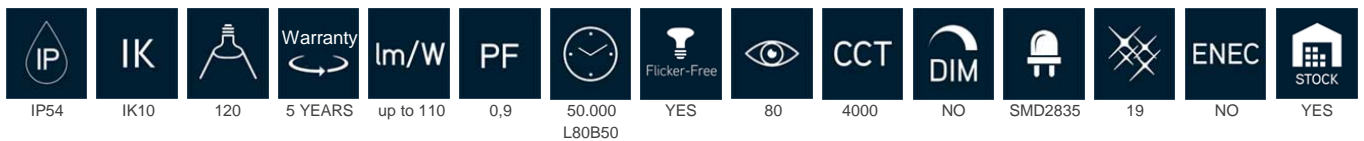

Technical specifications

Referentie	DISC104B
EAN code	5420076266059
ETIM code	EC002892

Electrical specifications

System power (W)	11
LED power (W)	10
Input voltage (Vac)	200-240
Frequency (Hz)	50/60
Driver included	yes
Driver intern/extern	intern
Driver brand	Lifud
Driver reference	LF-GIF015YA0250H
Dimmable	nee
Flicker free	yes
Power factor	0,9
THD	
Driver output (V)	25-40
Driver output (mA)	250
Isolation class	II
Energy class	A+*
N° circ. breaker 16A B	
N° circ. breaker 16A C	34
N° circ. breaker 16A D	54
Inrush current	

Warranty and certification

Lifetime (h)	50.000 L80B50
Warranty (years)	5 (excluding batteries)
ENEC	no


Photometric specifications

Light angle (°)	120
Color temperature (K)	4000
CRI	80
UGR	19
SDCM	3
Lumen output (Lm)	1127
Lm/W	110
Flux code	47 79 96 97 100
Ledchip	SMD2835
Led manufacturer	Hongli
N° of LEDs	288
Photobiological class	RG0

Dimensions and material properties


Dimensions (LxBxH)	320x320x54,5mm
Weight (kg)	1,2
Color	black RAL9004
Working temp. (°C)	-20~+40
IP value	IP54
IK value	IK10
UV resistant	yes
Seawater resistant	no
UL94	
N° in masterbox	8
N° on pallet	128
MOQ	1
Stock item	yes

Lumen distribution

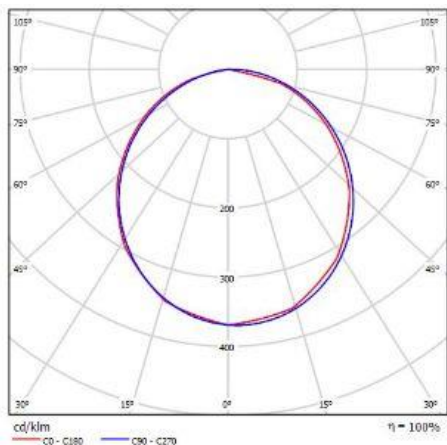


Distance curve:


Spectrum distribution

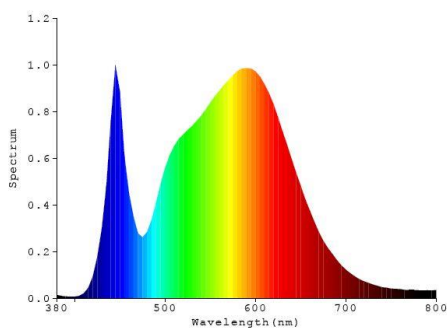

Lumendrop

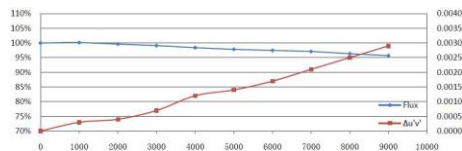

Dimensions

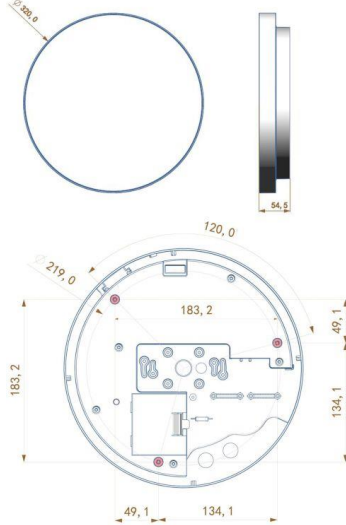

Connection diagram

