




Stylish surface-mounted luminaire 22W neutral white 4000K with white base RAL9004 and opal polycarbonate cover. Equipped with SMD2835 leds on an aluminum PCB with a flicker-free driver. Thanks to the separate mounting base and the toolless connection terminal, the luminaire can be installed in no time.

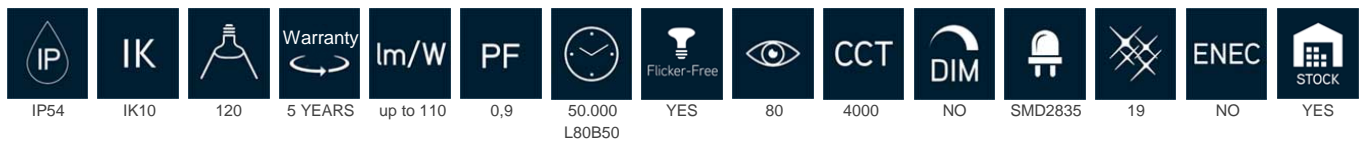

### Technical specifications

Referentie	DISC204B
EAN code	5420076266134
ETIM code	EC002892

### Electrical specifications

System power (W)	22
LED power (W)	20
Input voltage (Vac)	200-240
Frequency (Hz)	50/60
Driver included	yes
Driver intern/extern	intern
Driver brand	Boke
Driver reference	BK-PLL040-0550
Dimmable	nee
Flicker free	yes
Power factor	0,9
THD	
Driver output (V)	28-42
Driver output (mA)	550
Isolation class	II
Energy class	A+*
N° circ. breaker 16A B	
N° circ. breaker 16A C	34
N° circ. breaker 16A D	54
Inrush current	

### Warranty and certification

Lifetime (h)	50.000 L80B50
Warranty (years)	5 (excluding batteries)
ENEC	no


### Photometric specifications

Light angle (°)	120
Color temperature (K)	4000
CRI	80
UGR	19
SDCM	3
Lumen output (Lm)	2244
Lm/W	110
Flux code	48 80 97 100 100
Ledchip	SMD2835
Led manufacturer	Hongli
N° of LEDs	288
Photobiological class	RG0

### Dimensions and material properties


Dimensions (LxBxH)	320x320x54,5mm
Weight (kg)	1,2
Color	black RAL9004
Working temp. (°C)	-20~+40
IP value	IP54
IK value	IK10
UV resistant	yes
Seawater resistant	no
UL94	
N° in masterbox	8
N° on pallet	128
MOQ	1
Stock item	yes

### Lumen distribution

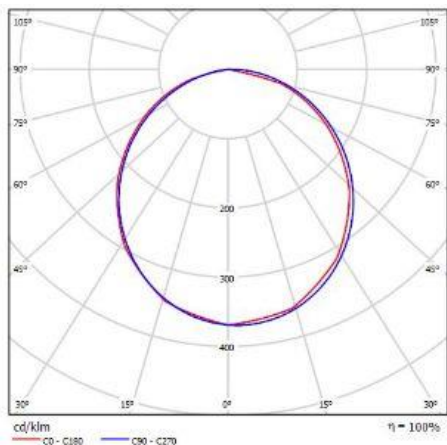


### Distance curve:


### Spectrum distribution

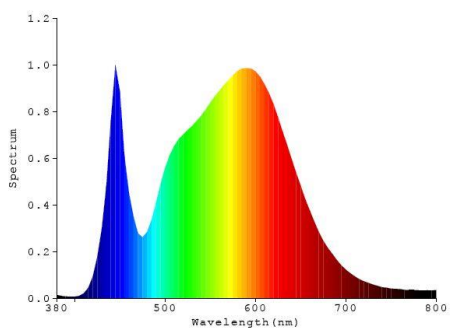

### Lumendrop

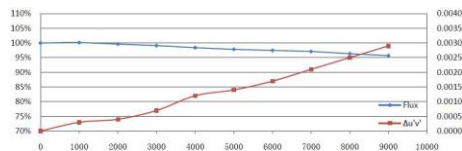

### Dimensions

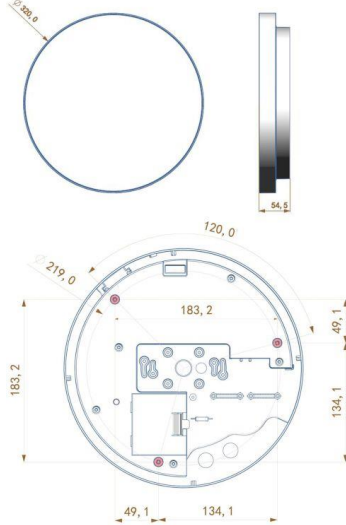

### Connection diagram

