


















Dreamline retrofit module 1.5m 63W 4000K 120gr, suitable for Trilux E-line, Veko PRN, Regiolux SDT / SPT / SMT, Siteco DUS, / Modario, Fluolite TRX, Zumtobel ZX1 / ZX2, Ludwig TR50W, Philips TTX / Maxos, Ridi VLT / SLG / VLG, Lite-light.ine light line system, length 1437mm. Equipped with DALI dimmable Osram driver, opal pmma cover 120°, with 7-pole wiring and male/female connectors. With built-in emergency unit 3 hours. Lumen output in emergency 10W. Operation leds emergency unit: red led means that the battery is being charged, when the battery is fully charged, this led will turn blue. The green LED lights up when the device is operating in emergency mode, ie when the power fails.

														
IP40	IK07	120	YEARS	up to 147	0,98	41.000 L90B10	YES	83	4000	DALI	SMD2835	25	YES	NO

Technical specifications

Referentie	DMAUNI15754R120DAEM
EAN code	5420076259211
ETIM code	EC000986

Electrical specifications

System power (W)	63
LED power (W)	61
Input voltage (Vac)	220-240V
Frequency (Hz)	50/60
Driver included	yes
Driver intern/extern	intern
Driver brand	Osram
Driver reference	Eti DALI 72/220-240/500 D LT2 L
Dimmable	DALI
Flicker free	yes
Power factor	0,98
THD	<10%
Driver output (V)	150
Driver output (mA)	400
Isolation class	I
Energy class	A+
N° circ. breaker 16A C	30
N° circ. breaker 16A D	
Inrush current	< 34A

Warranty and certification

Lifetime (h)	41.000 L90B10
Warranty (years)	(excluding batteries)
ENEC	yes


Photometric specifications

Light angle (°)	120
Color temperature (K)	4000
CRI	83
UGR	25
SDCM	4
Lumen output (Lm)	9236
Lm/W	147
Flux code	43 74 92 91 100
Ledchip	SMD2835
Led manufacturer	Edison
N° of LEDs	
Photobiological class	RG0


Dimensions and material properties

Dimensions (LxBxH)	1437x64,5x20mm
Weight (kg)	2,1
Color	white RAL9003
Working temp. (°C)	-25~+50
IP value	IP40
IK value	IK07
UV resistant	yes
Seawater resistant	no
UL94	
N° in masterbox	8
N° on pallet	0
MOQ	1
Stock item	no


Lumen distribution

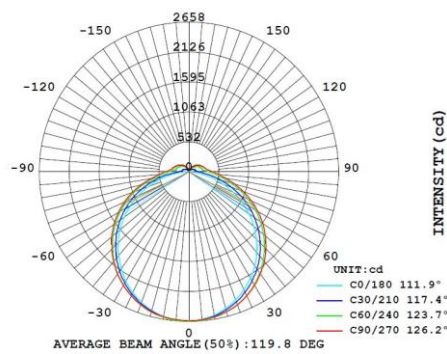


Distance curve:

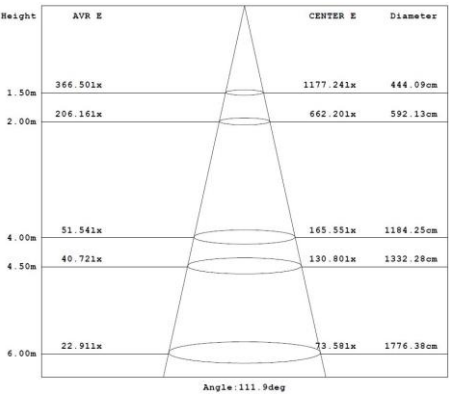

Spectrum distribution

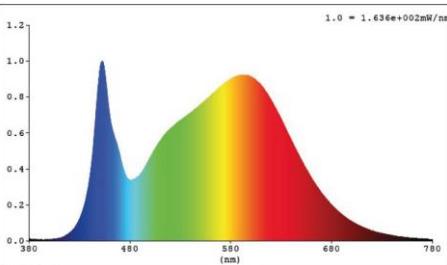

Lumendrop

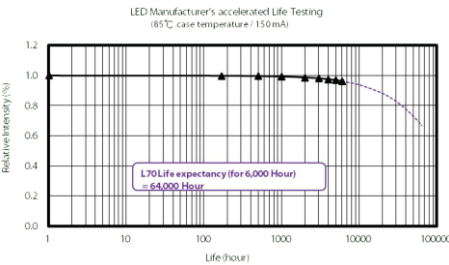


Dimensions



Name	L (mm)	W (mm)	H (mm)
1.5M Module	1437±0.5	64.5	26.5

Connection diagram

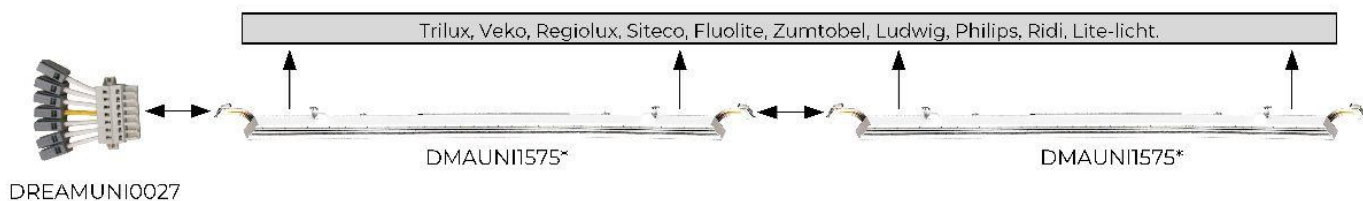

Input voltage DC 176~276VDC