



Dreamline retrofit module 1.5m 63W 4000K 90gr, suitable for Trilux E-line, Veko PRN, Regiolux SDT / SPT / SMT, Siteco DUS, / Modario, Fluolite TRX, Zumtobel ZX1 / ZX2, Ludwig TR50W, Philips TTX / Maxos, Ridi VLT / SLG / VLG, Lite-light.ine light line system, length 1437mm. Osram driver DALI dimmable, adjustable power 57/63W. Equipped with opal pmma cover light beam 90°. The LED module is equipped with 7-pole wiring and male/female connectors.

														
IP40	IK07	90	YEARS	up to 154	0,98	41.000 L90B10	YES	83	4000	DALI	SMD2835	<25	YES	NO

Technical specifications

Referentie	DMAUNI15754R90DA
EAN code	5420076259181
ETIM code	EC000986

Electrical specifications

System power (W)	63
LED power (W)	61
Input voltage (Vac)	220-240V
Frequency (Hz)	50/60
Driver included	yes
Driver intern/extern	intern
Driver brand	Osram
Driver reference	Eti DALI 72/220-240/500 D LT2 L
Dimmable	DALI
Flicker free	yes
Power factor	0,98
THD	<10%
Driver output (V)	150
Driver output (mA)	400
Isolation class	I
Energy class	A+
N° circ. breaker 16A C	30
N° circ. breaker 16A D	
Inrush current	< 34A

Warranty and certification

Lifetime (h)	41.000 L90B10
Warranty (years)	(excluding batteries)
ENEC	yes


Photometric specifications

Light angle (°)	90
Color temperature (K)	4000
CRI	83
UGR	<25
SDCM	4
Lumen output (Lm)	9717
Lm/W	154
Flux code	50 82 96 97 84
Ledchip	SMD2835
Led manufacturer	Edison
N° of LEDs	
Photobiological class	RG0


Dimensions and material properties

Dimensions (LxBxH)	1437x64,5x20mm
Weight (kg)	2,1
Color	white RAL9003
Working temp. (°C)	-20~+50
IP value	IP40
IK value	IK07
UV resistant	yes
Seawater resistant	no
UL94	
N° in masterbox	8
N° on pallet	0
MOQ	1
Stock item	no


Lumen distribution

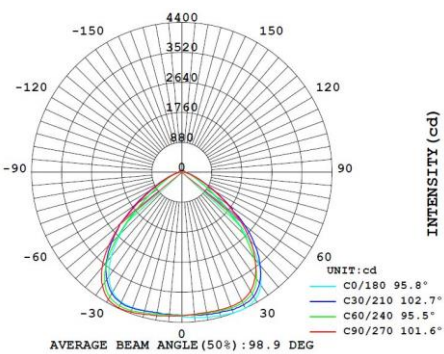


Distance curve:

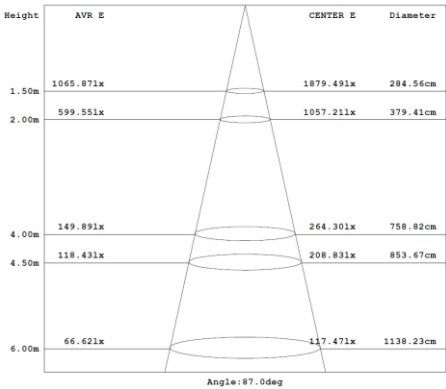

Spectrum distribution

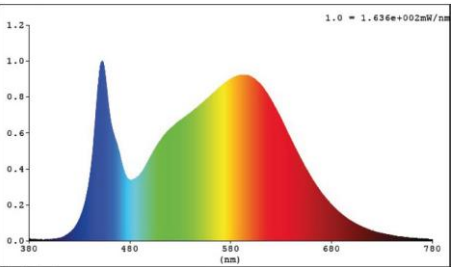

Lumendrop

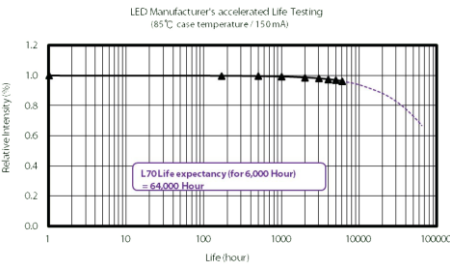


Dimensions



Name	L (mm)	W (mm)	H (mm)
1.5M Module	1437±0.5	64.5	26.5

Connection diagram

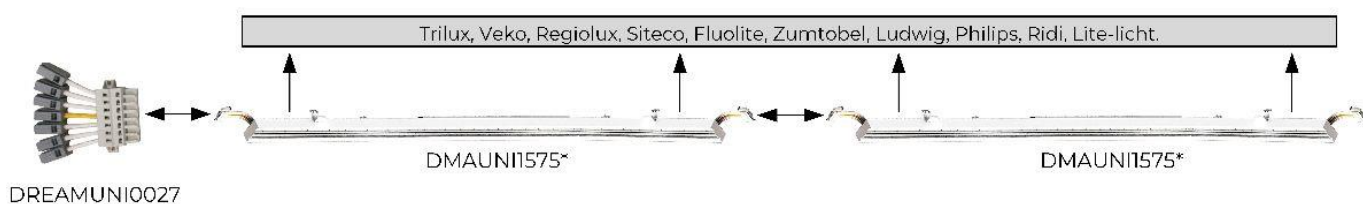

Input voltage DC 176~276VDC