


F145DI-W4000 Tracklight F1 45W 4000K CRI90 white i



Adjustable track spot for universal Eutrack 3-phase track. Housing white RAL9016 equipped with Citizen LED chip with high color rendering CRI90 and Alanod reflector 30° with an efficiency of 97%. Powergear rail adapter with integrated flicker free Osram driver, not dimmable. Lifespan 50,000h L80B20, warranty 5 years.

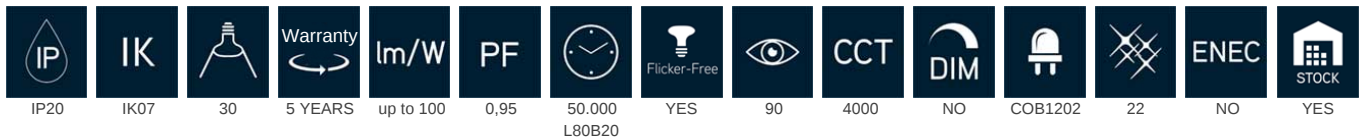

Technical specifications

Referentie	F145DI-W4000
EAN code	5420076263546
ETIM code	EC001744

Electrical specifications

System power (W)	47,36
LED power (W)	38
Input voltage (Vac)	220-240
Frequency (Hz)	50/60
Driver included	yes
Driver intern/extern	intern
Driver brand	Osram
Driver reference	Powergear adapter
Dimmable	nee
Flicker free	yes
Power factor	0,95
THD	
Driver output (V)	42
Driver output (mA)	1050
Isolation class	I
Energy class	F
N° circ. breaker 16A B	
N° circ. breaker 16A C	25
N° circ. breaker 16A D	39
Inrush current	<16A

Warranty and certification

Lifetime (h)	50.000 L80B20
Warranty (years)	5 (excluding batteries)
ENEC	no

Photometric specifications


Light angle (°)	30
Color temperature (K)	4000
CRI	90
UGR	22
SDCM	4,5
Lumen output (Lm)	4500
Lm/W	100
Flux code	96 99 100 98 100
Ledchip	COB1202
Led manufacturer	Citizen
N° of LEDs	1
Photobiological class	RG0

Dimensions and material properties

Dimensions (LxBxH)	236,5x110x150mm
Weight (kg)	1,4
Color	white RAL9016
Working temp. (°C)	-20~+45
IP value	IP20
IK value	IK07
UV resistant	yes
Seawater resistant	no
UL94	
N° in masterbox	16
N° on pallet	0
MOQ	1
Stock item	yes
EPA	


F145DI-W4000 Tracklight F1 45W 4000K CRI90 white i

Lumen distributio

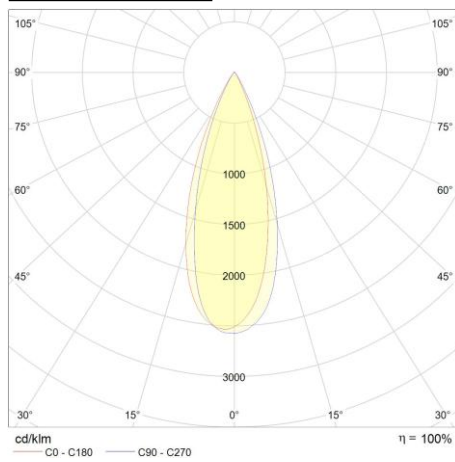


Distance curve:


Spectrum distributio

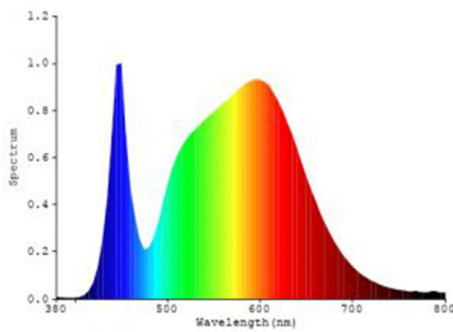

Lumendrop

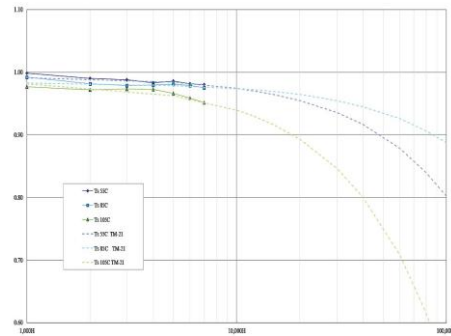

Dimensions

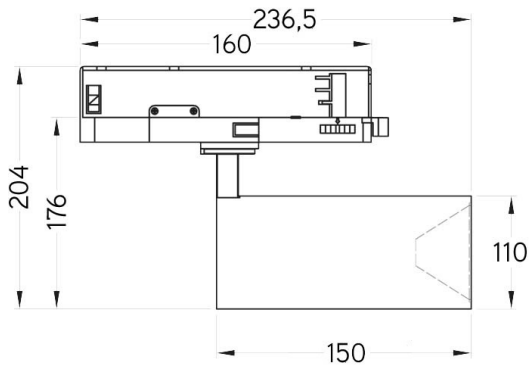

Connection diagram

