

Description:

Integraconnect PWM mono-color 4x4A, max. 384W



IP20



YES



PWM



3 YEARS

Integraconnect Bluetooth low energy 4 channel interface IP20 with compact dimensions for mono-color LED strips. 4 separately controllable channels of 4A, max 96W per channel at 24VDC. A push button can be connected directly to the interface for on/off & dimming. Suitable for 12/24VDC. Integraconnect is 100% compatible with Casambi. Download the free app on the Apple store or Google play.

Technical specifications

Reference	ITC-MC4
EAN code	5420076239633
ETIM code	EC002707

Electrical specifications

System power (W)	384
Input voltage (Vac)	12/24
Frequency (Hz)	DC
Dimmable	PWM
Flicker free	yes
Power factor	
Connection cable	/
Driver output (V)	12/24
Driver output (mA)	
Isolation class	II
Energy class	A+


Dimension and material properties

Dimensions (LxWxH)	90x70x32mm
Weight (kg)	0,35
Working temp. (°C)	-20~+45
IP value	IP20
Number in bulk	
Number on pallet	0
MOQ	1
Stock item	yes

Warranty and certification

Lifetime (h)	
Warranty (year)	3
ENEC	no

Dimension

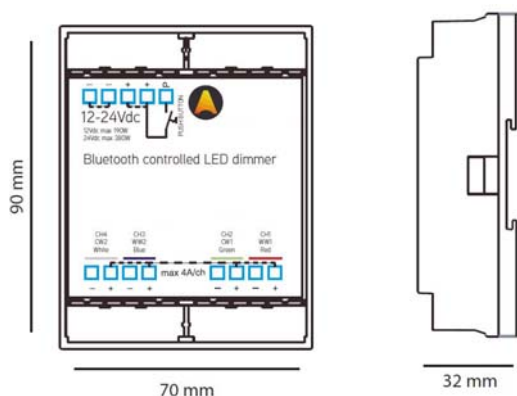

Connection diagram

