



Universal LED driver CC 36W for LED panels or downlights. Suitable for dimming with TRIAC, 1-10V or DALI dimmer. Output current adjustable with dip switch

350/400/450/500/550/600/650/700/750/800/850/900/950/1000mA.

No PWM output signal but amplitude dimming = no flicker or stroboscopic effect. Compatible with DALI2 software.



IP20



5 YEARS



0,95



YES



1-10V/DALI



NEE



JA

### Technical specifications

Reference	UNIDRIVER36
EAN code	5420076256760
ETIM code	EC002710

### Electrical specifications

System power (W)	36
Input voltage (Vac)	220-240VAC
Frequency (Hz)	50/60
Dimmable	TRIAC/1-10V/DALI/push
Flicker free	yes
Power factor	0,95
Connection cable	0,2m
Driver output (V)	8-42V
Driver output (mA)	350-1000mA
Isolation class	I
Energy class	A++
Driver brand	
Driver model	
Inrush current	2A
Number on C16A	48
Number on D16A	


### Dimension and material properties

Dimensions (LxWxH)	170x59x29mm
Weight (kg)	0,18
Working temp. (°C)	-20~+45
IP value	IP20
Number in bulk	48
Number on pallet	0
MOQ	1
Stock item	yes

### Warranty and certification

Lifetime (h)	
Warranty (year)	5
ENEC	no

### Dimension

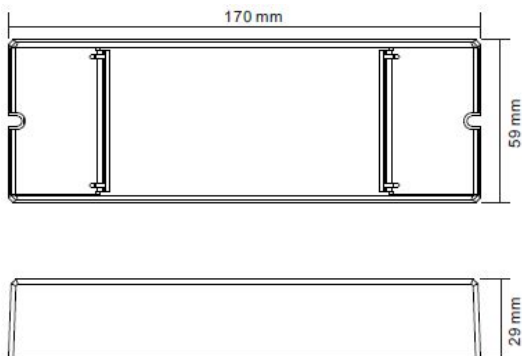

### Connection diagram

