


## A15PIRDALI Dreamline module 1437mm microwave sensor DALI



Empty Dreamline module with built-in DALI microwave sensor and daylight sensor. Detection range up to 6 meters. Voltage range 120-277Vac 50/60Hz. Maximum load 15 luminaires ~ 30mA. Adjustable sensitivity 10/50/75 or 100%. Switch-on time 30s/1m/5m/10m/20m ou 30m. Daylight sensor 2/10/50 or off. Stand-by corridor function 0/10s/1m/5m/10m/30m/14h or off. Stand-by dimming level 5/10/20 of

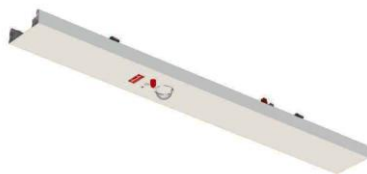

IP40



5 YEARS



NO

### Technical specifications

|           |               |
|-----------|---------------|
| Reference | A15PIRDALI    |
| EAN code  | 5420076238261 |
| ETIM code | EC000986      |

### Dimensions and material properties

|                      |                |
|----------------------|----------------|
| Dimensions (LxWxH)   | 1437x64,5x20mm |
| Outer diameter (mm)  |                |
| Cutout diameter (mm) |                |
| Weight (kg)          | 0,9            |
| Color                | white RAL9003  |
| IP value             | IP40           |
| N° in masterbox      | 1              |
| N° on pallet         | 0              |
| MOQ                  | 1              |

### Warranty and certification

|                  |   |                       |
|------------------|---|-----------------------|
| Warranty (years) | 5 | (excluding batteries) |
|------------------|---|-----------------------|

### Dimensions



| Name        | L (mm)   | W (mm) | H (mm) |
|-------------|----------|--------|--------|
| 1.5M Module | 1437±0.5 | 64.5   | 26.5   |

